Venetian

NASCO

OUR VENETIAN COLLECTION

Venetian is a unique and sophisticated porcelain tile that is perfect for any formal setting. This collection contains different shaped chip sizes and 4 real netural colors. Venetian is a terrazzo-lookalike that will bring natural beauty to any space.

Venetian can be poured in a variety of colors and patterns, making it a very versatile choice for use in a wide range of design styles. It is a very durable material, making it well-suited for use in high-traffic areas. This collection is yours to explore and add elegant touches to any project.

Venetian Fog

Venetian Storm

COLORS

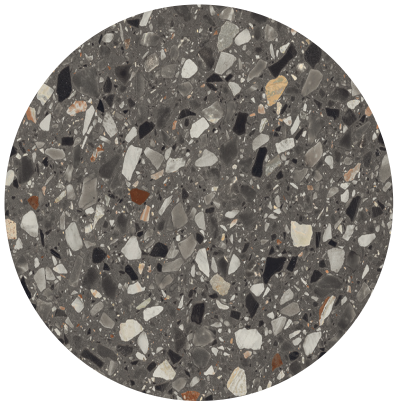

Storm

12" x 24"
24" x 48"
24” x 24”

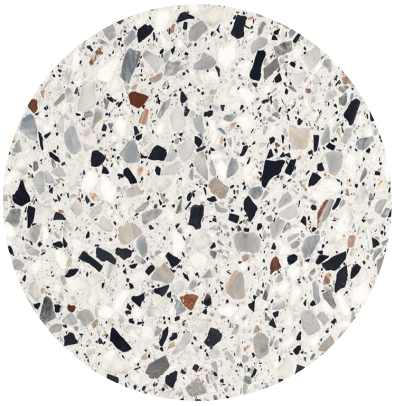

Rainbow

12" x 24"
24" x 48"
24” x 24”

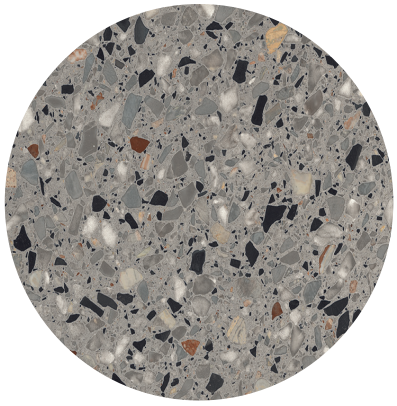

Fog

12" x 24"
24" x 48"
24” x 24”

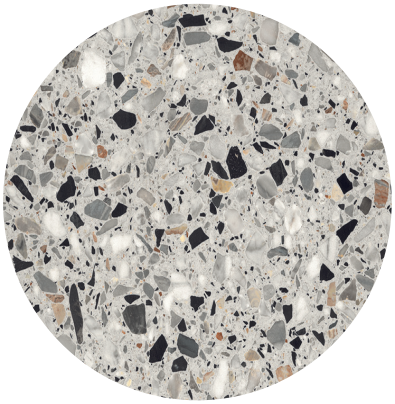

Cloud

12" x 24"
24" x 48"
24” x 24”

Venetian Storm

Venetian Rainbow

Venetian Cloud

- Classification in accordance with EN 14411 BI_A – ISO 13006

	Caratteristica Tecnica Technical Characteristic	**Norma** Norm	**Valore prescritto** Value required	**Valore medio** Mean value NASCO	**Norma** Norm NASCO	**Valore medio** Mean value NASCO
	Lunghezza e larghezza Lenght and width / Länge und Breite / Longueur et largeur	ISO 10545.2	±0,6% (±2,00 mm)	**Conforme** In accordance Erfüllt Conforme	ASTM C-499 ASTM C-485 ASTM C-502	In accordance
	Spessore Thickness / Stärke / Epaisseur		±5% (±0,5 mm)			
	Rettilineità lati Warpages of edges / Geradheit der Kanten / Réctitude des arêtes		±0,5% (±1,5 mm)			
	Ortogonalità Wedging / Rechtwinkligkeit / Orthogonalité		±0,5% (±2,00 mm)			
	Planarità Flatness / Planität / Planimétrie		±0,5% (±2,00 mm)			
	Assorbimento % d'acqua Water absorption Wasseraufnahme % Absorption d'eau %	ISO 10545.3	≤ 0,5%	**Conforme** In accordance Erfüllt Conforme	ASTM C-373	In accordance
	Resistenza alla flessione Bending strength Biegezugfestigkeit Résistance à la flexion	ISO 10545.4	Modulus of rupture (average): R ≥ 35N/mm² Breaking strength for thickness ≥ 7,5 mm: S > 1300 N	**Conforme** In accordance Erfüllt Conforme	ASTM C-648 250 LBS or greater	In accordance
	Dilatazione termica lineare tra 20° e 100° C Linear thermal expansion between 20° and 100° C Lineare Wärmeausdehnung zwischen 20° und 100° C Dilatation thermique linéaire entre 20° et 100° C	ISO 10545.8	**Secondo i dati del costruttore** According to builder's specifications Laut angaben des herstellers Selon les elements du costructeur	≈ $7x10^{-6}$ C^{-1}		
	Resistenza agli sbalzi termici Thermal shock resistance Temperaturwechselbeständigkeit Résistance aux écarts de température	ISO 10545.9	**Richiesta** Request Bitte Demande	**Resistente** Resistant Widerstehend Résistant		
	Resistenza al gelo Frost resistance Frostbeständigkeit Résistance au gel	ISO 10545.12	**Richiesta** Request Bitte Demande	**Resistente** Resistant Widerstehend Résistant	ASTM C-1026	In accordance
	Resistenza all'attacco chimico Resistance to chemical attack Beständigkeit gegen Chemikalien Résistance à l'attaque chimique	ISO 10545.13	**Secondo i dati del costruttore** According to builder's specifications Laut angaben des herstellers Selon les elements du costructeur	**Resistente** Resistant Widerstehend Résistant	ASTM C-650	In accordance
	Resistenza dei colori alla luce Colours resistance to light Lichtbeständigkeit Résistance des couleurs à la lumière	DIN 51094	**Nessuna alterazione** No alteration Keine Veränderung Aucune altération	**Conforme** In accordance Erfüllt Conforme		
	Resistenza alle macchie Stain resistance Fleckenfestigkeit Résistance aux taches	ISO 10545.14	≥ Classe 3 Metodo di prova disponibile Test method available Verfügbare prüfmethode Methode d'essai disponible	**Conforme** In accordance Erfüllt Conforme		
	Resistenza allo scivolamento Slippage resistance Rutschsicherheit Résistance au glissement	DIN 51130 *	9 ≤ R ≤13	NATURALE | R9	ASTM C-1028 * COF ≥ 0,6 Dry ≥ 0,6 Wet	NATURALE |
		DIN 51097 *	A,B,C	NATURALE | A	ANSI * 137.1-2012 DCOF > 0,42 Wet	NATURALE | > 0,42
	Pendulum slip test	BS EN 7976-2*	> 36 Dry > 36 Wet	NATURALE	AS 4586: 2013 CLASS	NATURALE

SIZES

TILES

Height	Width	Thickness	Nominal
12"	24"	3/8"	Yes
24"	24"	3/8	Yes
24"	48"	3/8	Yes

Finishes: Matte

Trims



3" x 24"
Bullnose Base

ORDER NOTE

Matte is a naturale matte finish that replicates the finish of the material on which it is based. For a stone and concrete effect tile, the surface will be very similar to the look and feel of the natural material.

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

"Wet" application only applies to matte or textured finishes

INTERIORS	EXTERIORS	WALLS
FLOORS	APPLICATIONS	WET
RESIDENTIAL	COMMERCIAL	HIGH-TRAFFIC

DCOF .42 – PASS
MATTE FINISH

10% PRE-CONSUMER
RECYCLED CONTENT