


Agglo Moro

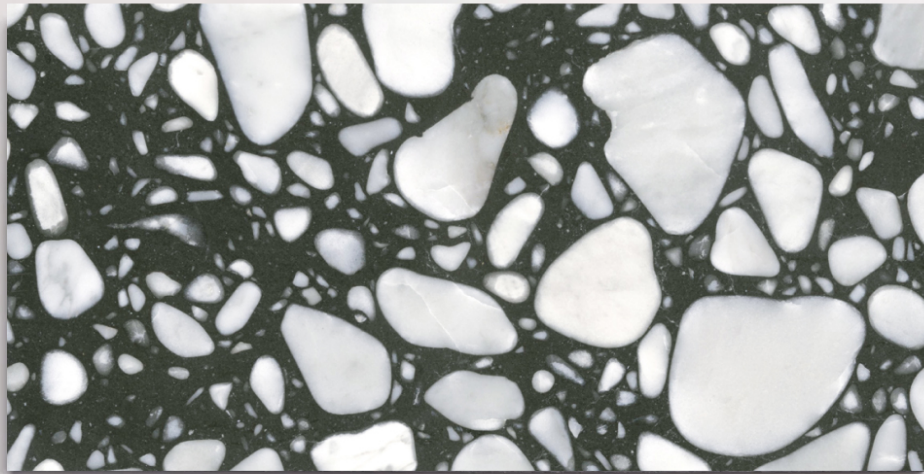

SIZES

12" x 24"
16" x 16"
24" x 48"
48" x 48"
Slabs 2CM

12" x 12"
18" x 18"
24" x 24"
Slabs 1.2 CM
Slabs 3CM

Sizes listed are recommended, any and all sizes are available upon request.

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

Slabs available in 120" x 49".

Custom colors and aggregate sizes are available upon request with a minimum order quantity of 10,000 SF

LEAD TIME

1-5 Business Days | 24x24 Honed + 2CM Slabs
Polished
6-8 Weeks | All other sizes + finishes

Lead times are approximate and can vary based on quantity ordered, production schedule & delivery location.

TRIMS

All available bases and coping are available in any size and thickness upon request.

FORMAT + THICKNESS

Slab | 1/2 - 3/4 - 1.25
Tile | 1/2 - 3/4 - 1.25

Thickness is determined by product size and format. Sizes larger than 24x48 typically require a minimum thickness of 3/4".

1/2" Thick Slabs are only recommended for wall applications.

Most of our tiles are rectified and micro-beveled, however we recommend confirming with us prior should this be a necessity.

FINISHES

Brushed
Honed
Polished

Brushed finish is not available in 16" x 16' and 24" x 24".

APPLICATIONS

Floors
Interiors
Wet

Heavy Traffic
Walls

"Wet" application only applies to honed or textured finishes.

TECHNICAL DATA

Honed finish passes required DCOF
Rating of .42

Agglo is comprised of 97% Marble and 3% Resin.

Please refer to the Technical Data Sheet for the complete technical details.

CARE + MAINTAINCE

Please refer to our Stone + Tile 101 page for a complete guide

[nasco.com/stone-tile-101](https://www.nasco.com/stone-tile-101)