


# Agglo Farn

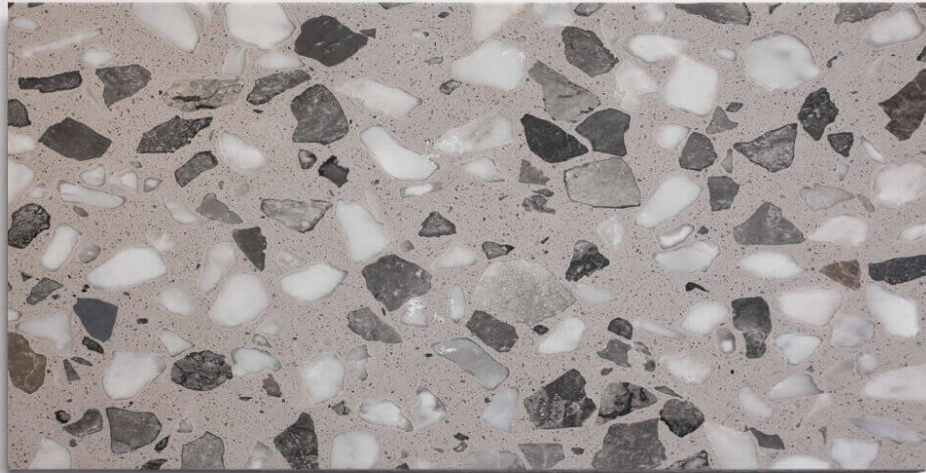

## SIZES

12" x 24"  
16" x 16"  
24" x 48"  
48" x 48"  
Slabs 2CM

12" x 12"  
18" x 18"  
24" x 24"  
Slabs 1.2 CM  
Slabs 3CM

Sizes listed are recommended. Any size is available upon request.\*

Slabs available in 120" x 49"  
All sizes are nominal and in inches.

\*Special cut sizes and additional trim pieces are available upon meeting a minimum order quantity.

\*Custom colors and aggregate sizes are also available upon request with a minimum order quantity of 10,000 SF.

Please note: all of our terrazzo products are RESIN BASED (not concrete based).

## LEAD TIME

**6-8 Weeks** | All sizes in Brushed, Honed, and Polished finishes  
**7-9 Weeks** | Fluted finish

Lead times are approximate and can vary based on quantity ordered, production schedule & delivery location. Slab Disclaimer: this color in SLAB format is special order with a quantity requirement of 2 slabs minimum in order to safely pack and secure the slabs during the shipping journey. There is NO minimum for any tile sizes. Need less than 2 slabs? Please provide us with exact dimensions of what's needed. We can custom cut the slab to size in order to fit the material in a secure crate and avoid any breakage while shipping. For any further clarification or questions, please feel free to contact us directly.

## TRIMS

All available bases and coping are available in any size and thickness upon request.

---

## FORMAT + THICKNESS

Fluted | 2CM  
Slab | 1/2 - 3/4 - 1.25  
Tile | 1/2 - 3/4 - 1.25

Thickness is determined by product size and format. Sizes larger than 24x48 typically require a minimum thickness of 3/4".

1/2" Thick Slabs are only recommended for wall applications.

Most of our tiles are rectified and micro-beveled, however we recommend confirming with us prior should this be a necessity.

---

## FINISHES

Brushed  
Honed

Fluted  
Polished

Brushed finish is not available in 16" x 16' and 24" x 24".

Fluted finish available in any size up to 48" x 120" in increments of 12"  
Order Quantity should be in increments of 40 SF  
Bar size is 1.5"

---

## APPLICATIONS

Floors  
Interiors  
Wet

Heavy Traffic  
Walls

"Wet" application only applies to honed or textured finishes.

---

## SUSTAINABILITY

Greenguard Certificate 

LEED 

Environmental Policy 

---

## TECHNICAL DATA

Honed finish passes required DCOF  
Rating of .42

Agglo is comprised of 97% Marble and 3% Resin.

Please refer to the Technical Data Sheet for the complete technical details.

---

## CARE + MAINTENANCE

Please refer to our Stone + Tile 101  
page for a complete guide

[www.nascostonetile.com/stone-tile-101](http://www.nascostonetile.com/stone-tile-101)