




**METRO**  
CERAMIC WALL TILES



**METRO**



dark grey matt 4"x12"





light grey glossy 3"x6"  
& light beige glossy 3"x6"



# METRO



## Sizes

---



4"x16"



3"x6"



4"x12"




6"x6"




2.5"x10"

## Decors

---

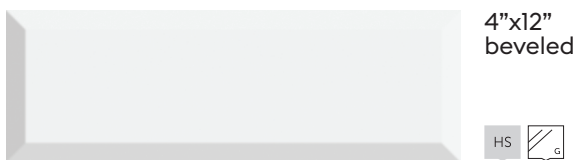

4"x12"  
beveled




3"x6"  
beveled



## Finish

---



Matt




Glossy




light grey



white




ivory

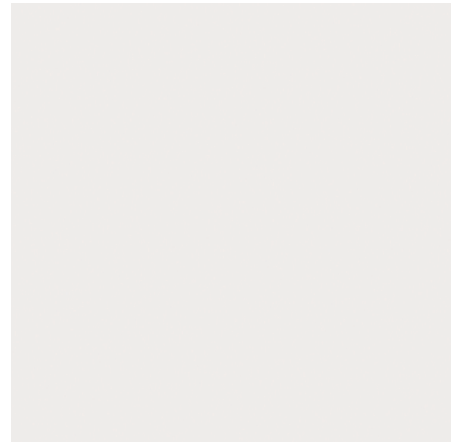

dark grey




light beige

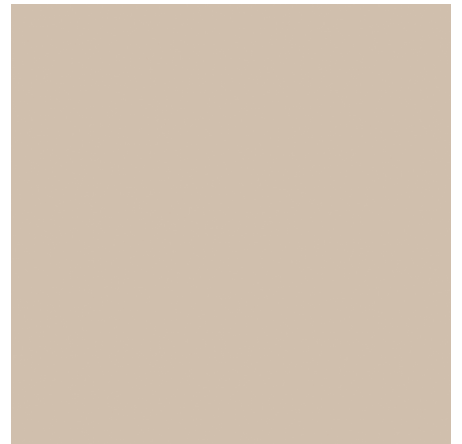

graphite grey



nero

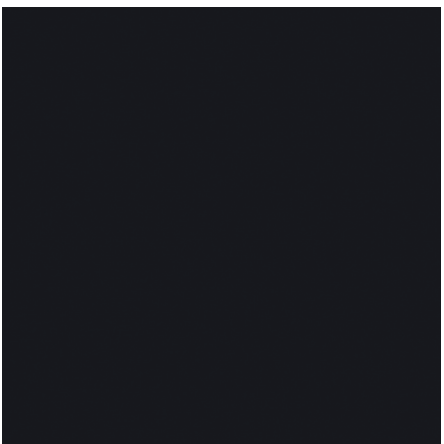












# METRO

			light grey	dark grey	graphite grey	nero	white	ivory	light beige
size	finish								
4"x14"	matt	sft	✓	✓	✓	✓	✓	✓	✓
	glossy	sft	✓	✓	✓	✓	✓	✓	✓
4"x12"	matt	sft	✓	✓	✓	✓	✓	✓	✓
	glossy	sft	✓	✓	✓	✓	✓	✓	✓
2.5"x10"	matt	sft	✓	✓	✓	✓	✓	✓	✓
	glossy	sft	✓	✓	✓	✓	✓	✓	✓
6"x6"	matt	sft	✓	✓	✓	✓	✓	✓	✓
	glossy	sft	✓	✓	✓	✓	✓	✓	✓
3"x6"	matt	sft	✓	✓	✓	✓	✓	✓	✓
	glossy	sft	✓	✓	✓	✓	✓	✓	✓
4"x12" beveled	glossy	sft	-	-	-	-	✓	-	-
3"x6" beveled	glossy	sft	-	-	-	-	✓	-	-



nero matt & nero glossy 4"x16"

# TECHNICAL CHARACTERISTICS - WHITE BODY CERAMIC TILES ( BIII)

	Test Description	Standard Test Method	International Standard ISO 13006	RAK Ceramics Specifications
	Length & Width	BS EN ISO 10545-2	+/- 0.5%	+/- 0.3%
	Thickness	BS EN ISO 10545-2	+/-10%	+/- 5.0%
	Rectangle Squareness	BS EN ISO 10545-2	+/- 0.5%	+/- 0.4%
	Straightness of sides	BS EN ISO 10545-2	+/- 0.3%	+/- 0.3%
	Surface Flatness	BS EN ISO 10545-2	+0.5% / -0.3%	+/- 0.3%
	Water Absorption	BS EN ISO 10545-3	10% < E <= 20%	10% <E <= 18%
	Modulus of Rupture	BS EN ISO 10545-4		
	Thickness > = 7,5mm Thickness < = 7,5mm		>=12 N/mm2 >=15 N/mm2	>=16 N/mm2 >=16 N/mm2
	Breaking Strength	BS EN ISO 10545-4		
	Thickness > = 7,5mm Thickness < = 7,5mm		>=600N >=200N	>=650N >=400N
	Resistance to Thermal Shock	BS EN ISO 10545-9	No visible defect	No visible defect
	Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
	Resistance to stains	BS EN ISO 10545-14	Manufacturer to state class	Stain removed min. class 4

Note : Shade variation across the batches is inherent to the manufacturing process and the pre-laying colour comparison is recommended.

# ICONS

## TYPOLGY



WHITE BODY  
CERAMIC TILES

## EDGE



STRAIGHT

## SURFACE STRUCTURE



SMOOTH

Tiles with an even and regular surface, free from perceptible projections, lumps, or indentations.



LIGHT STRUCTURE

Tiles with an uneven, irregular surface, with a structure perceptible to the eye and touch.



HEAVY STRUCTURE

Tiles with a highly irregular surface.

## FINISH



NATURAL

Pressed tiles without further work after firing.

## SURFACE LOOK



MATT

Natural looking surface.



GLOSSY

The resulting surface has a medium degree of reflection.

## SUGGESTED APPLICATIONS



WALL TILES







NASCO Stone & Tiles Corporate HQ  
200 MARKLEY ST  
Port Reading NJ, 07064  
732 602 9600  
[nascostonetile.com](http://nascostonetile.com)

NASCO STONE + TILE  
20 W 22 Street #812  
NEW YORK, NY 10010  
212 229 2009  
[nycshowroom@nasco.com](mailto:nycshowroom@nasco.com)