

ALTITUDE

N A S C O

OUR ALTITUDE COLLECTION

is inspired by the metropolitan characteristics of cement.

Altitude porcelain tiles anticipate exclusive trends for interior design thanks to their soft and delicate shades of color. The design project is enhanced by the hexagonal shapes and vintage decorative elements, recovering the tradition of cementine tiles reinterpreting it in a modern way.

In the post-industrial loft the minimal character of Altitude underlines every design detail. The feel of the delicate and lived-in surface reveals its versatility in combination with the cutting edge cementine tiles in a contemporary interpretation.

The best part is that the collection is entirely Made and stocked in USA.




Altitude Dark Grey




Altitude Grey

TILES

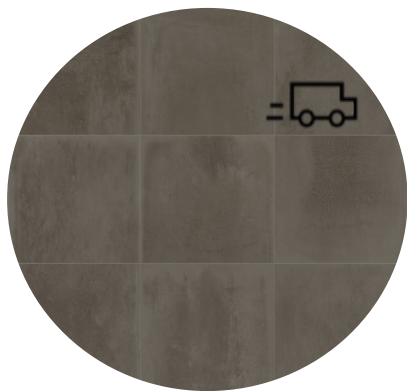


Brown

12" x 24"
24" x 24"

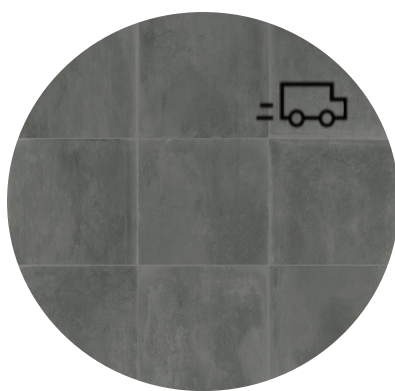


Dark Grey

12" x 24"
24" x 24"

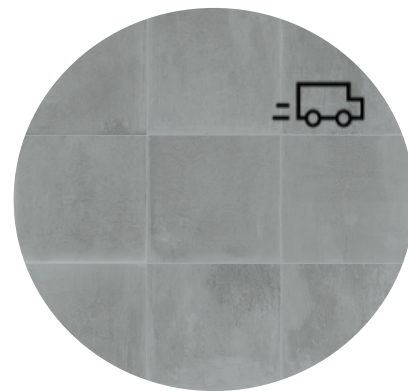


Light Grey

12" x 24"
24" x 24"

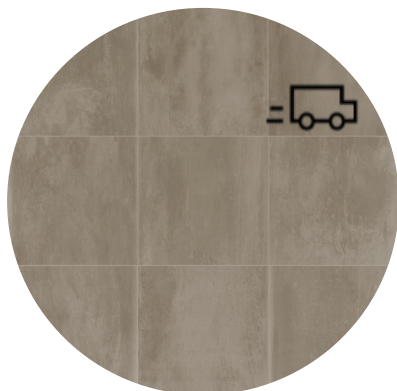


Sand

12" x 24"
24" x 24"

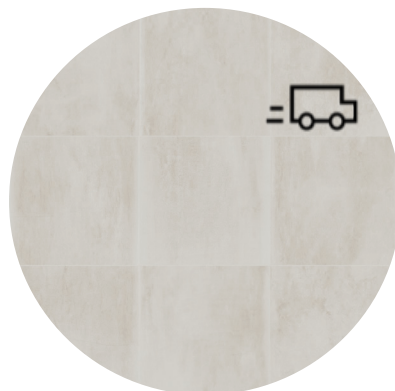


White

12" x 24"
24" x 24"

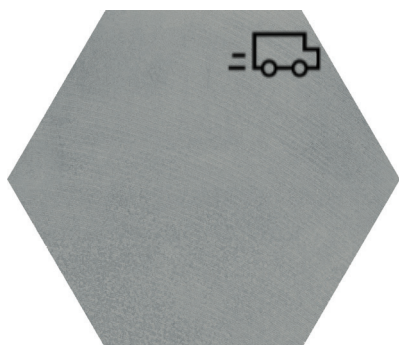


Grey Hexagon

8.5" x 10"

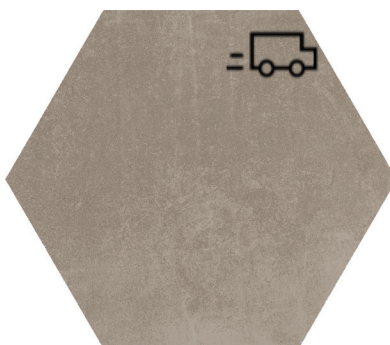

Sand Hexagon

8.5" x 10"

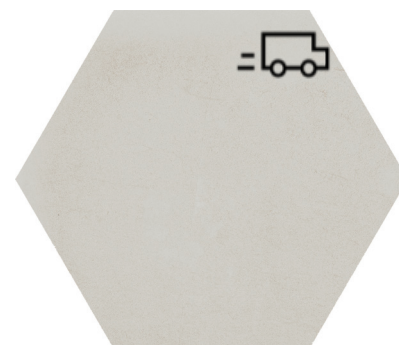

White Hexagon

8.5" x 10"



Altitude Brown





Altitude White with Grey, Sand and White Hexagon

PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A137.1*	RESULTS
Water absorption *	C373	≤ 0.5%	COMPLY WITH ANSI A137.1
DCOF Average dynamic coefficient of friction **	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	COMPLY WITH ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	COMPLY WITH ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH ANSI A137.1
Chemical resistance	C650	As reported	UNAFFECTED
Breaking strength	C648	250 lbf or greater	COMPLY WITH ANSI A137.1
Thickness	C499	Range: 0.04 in	COMPLY WITH ANSI A137.1

* Average values referred to our production and related to the matte finish of the product.
 ** As far as values relating to the matte finish of the product and to tests carried out by certified external laboratories whose results are available upon request, we are willing to check the lot you are interested in purchasing.

- Be sure to use tiles belonging to the same caliber.
- Test results are available on request.
- Nasco tiles can be slippery when wet. We recommend to make sure that the surface is always dry.
- The information provided can be subject to change. Please refer to nascostonetile.com for the latest, most accurate and up-to-date information.

SIZES

TILES

Height	Width	Thickness	Nominal
8.5"	10"	3/8"	Yes *HEXAGON*
12"	24"	3/8"	Yes
24"	24"	3/8"	Yes


MOSAICS

Height	Width	Thickness	Nominal
2"	2"	3/8"	Yes

TRIMS



3" x 24"
Bullnose Base



6" x 12"
Cove Base

FINISHES



Matte

ORDER NOTE

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

All mosaics are available in corresponding field tiles. Mosaics are mesh-mounted.

INTERIORS	EXTERIORS	WALLS
APPLICATIONS		
FLOORS	FACADE	HIGH-TRAFFIC



DCOF .42 – PASS
HONED + BRUSHED FINISH

