

SPACE

N A S C O

OUR SPACE PORCELAIN SLABS

ARE SO INNOVATIVE AND VERSATILE THAT THEY BREAK DOWN THE BARRIERS BETWEEN SURFACES FOR ARCHITECTURE AND FURNISHING, BETWEEN INDOOR AND OUTDOOR USE. THE FREEDOM TO DESIGN GROWS, WITH SOLUTIONS THAT WERE IMPOSSIBLE UNTIL YESTERDAY.



Space Stone Grey




Space Calcatta



Space Blue de Savoie





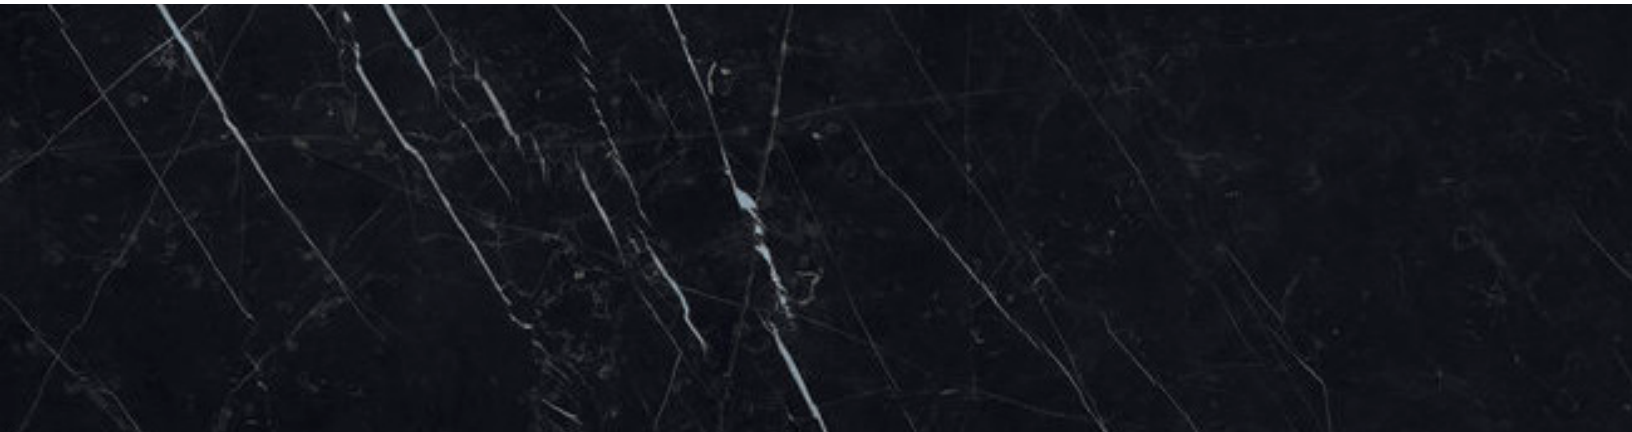

Space Nero Marquina



Space Travertino



Space Onyx Grigio



Space Abrabescato

COLORS


AVAILABLE FINISHES



Polished




Honed



ARABSCETTO



BLUE DE SOVIE



CALCATA



CONCRETE GRAY HONED



CONCRETE SILVER HONED



CREMA MARFI EXTRA




GAUDI




NERO MARQUINA



ONYX AVORIO




ONYX GRIGIO



SATIN BLACK




SATIN WHITE



STATUARIO



STEEL GREY



STONE GREY



THASSOS



TRAVERTINO CLASSICO



TRAVERTINO




VENATINO WHITE



WHITE LACE




WHITE ONYX



Quickship Available




Space Stone Grey

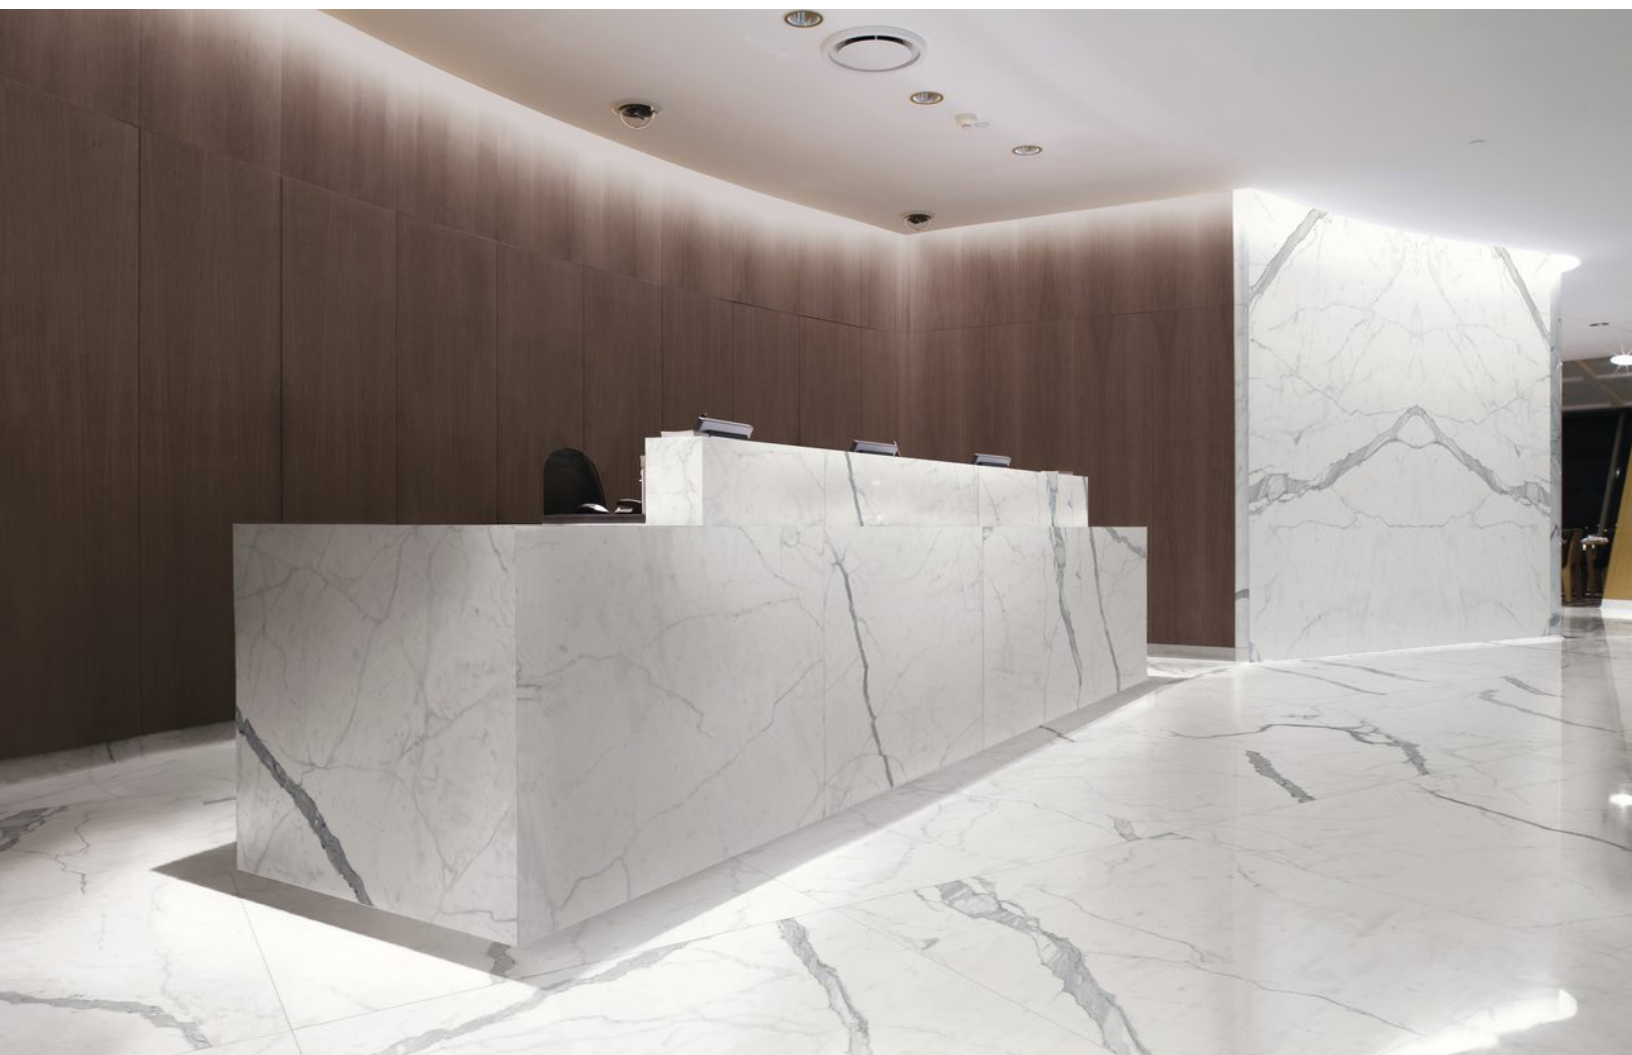



Crema Marfil Extra



PROPRIETÀ FISICO-CHIMICHE PHYSICAL-CHEMICAL PROPERTIES	TIPO DI PROVA STANDARD OF TEST	VALORE PRESCRITTO REQUIRED VALUE	Space Value	ASTM STANDARD OF TEST	ASTM INDUSTRY STANDARDS	ASTM RESULTS (as tested by Smith Enrly laboratory)
 Dimensioni Sizes	ISO 10545.2	Lunghezza e larghezza Length and width Spessore Thickness Rettilinearità spigoli Linearity Ortogonalità Wedging Planarità Warpage	± 0,6% max ± 0,5 mm ± 5% max ± 3% ± 0,5% max ± 0,5 mm ± 0,6% max ± 1 mm ± 0,5% max ± 0,2%	ASTM C-499	Average facial dimension < 1,5% Wedging ±1% - Warpage ± 1% of any edge Range of thickness (inch.) < 0,04%	0,15% 0,014% - 0,33% 0,17%
 Assorbimento d'acqua Water absorption	ISO 10545.3	≤ 0,5%	≥ 0,06% *	ASTM C-373	Tile shall be impervious	< 0,05%
 Resistenza alla flessione Flexion resistance	ISO 10545.4	Modulo di rottura Modulus ≥ 35 N/mm ²	53 N/mm ²			
 Resistenza all'abrasione profonda Deep abrasion resistance	ISO 10545.6	Volume ≤ 175 mm ³	≥ 142 mm ³	ASTM C-501	≥ 100	217
 Coefficiente di dilatazione termica lineare Coefficient of linear thermal-expansion	ISO 10545.8	≤ 9x10 ⁻⁶ °C ⁻¹	6 MK ⁻¹	ASTM C-1028		Meets or exceeds requirements (Please ask for individual test reports)
 Resistenza al gelo Frost resistance	ISO 10545.12	Non devono presentare rotture o alterazioni apprezzabili della superficie Must not produce noticeable alteration to surface	Non gelive Frostproof	ASTM C-1026	No sample must show alterations to surface	Resistant
 Resistenza ai prodotti chimici Chemical resistance	ISO 10545.13	Non devono presentare apprezzabili segni d'attacco Chimico Must not produce noticeable signs of chemical attack	Non attaccate Not attacked	ASTM C-650 ASTM C-648	To 10% HCL Acid - No sample must show visible signs of chemical attack to 10% KOH Alkali 250 PSI or greater	Unaffected
 Resistenza alle macchie Stain resistance	ISO 10545.14	1 < X < 5	CLASSE 5 - CLASS 5 ** Macchie rimosse con acqua corrente calda (senza detergente) Stains removed by hot running water (without detergent)			
 Resistenza dei colori alla luce Color resistance to light	DIN 51094	Non devono presentare apprezzabili variazioni di colore Must not produce noticeable colour variation	Campioni inalterati in brillantezza e colore No change in brightness or colour of samples			
 Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness)	DIN 51130	Metodo disponibile Test method available	R9 Superficie prolevigata Pre-polished surface			
 Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness)	BCRA REP CEC 6/81	Attrito soddisfacente Satisfactory friction 0,40 ≤ μ ≤ 0,74	>0,40 Superficie prolevigata Pre-polished surface			
 Resistenza al fuoco Fire resistance	96/603/CE		A1			

PIETRE NATURALI DI FABBRICA A TUTTA MASSA CON LE CARATTERISTICHE TECNICHE DEL PORCELLANATO FULL-BODY MANUFACTURED NATURAL STONES WITH PORCELAIN TECHNICAL FEATURES

Classificazione secondo le norme UNI EN 14411 gruppo Bia o ISO 13006 Allegato G gruppo BI a UGL
Classification in accordance with UNI EN 14411 standards Bia group or ISO 13006 Annex G standards BI a UGL group

*** I prodotti con assorbimento < 0,5 sono classificati secondo le norme UNI CEN "Fully vitrified tiles" e secondo le norme ASTM "Impervious tiles"**
The products having an absorption < 0,5 are classified according to the UNI CEN standards "Fully vitrified tiles" and according to the ASTM standards "Impervious tiles"

**** Varia secondo la finitura di superficie**
It can vary according to the surface finish

Space White Lace



Space Calcutta

SIZES

AVAILABLE FOR: Arabescato
Calacatta
Nero Marquina
Statuario
White Lace

AVAILABLE FINISHES:



Polished



Honed

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
40"	40"	1/4"	Yes
60"	60"	1/4"	Yes
60"	120"	1/4"	Yes

AVAILABLE FOR: Blue De Savoie
Crema Marfil Extra
Gaudi
Onyx Avorio
Onyx Grigio
Travertino
Venatino White

AVAILABLE FINISHES:



Polished



Honed

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
60"	60"	1/4"	Yes
60"	120"	1/4"	Yes

AVAILABLE FOR: Travertino Classico
White Onyx

AVAILABLE FINISHES:



Polished

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
60"	60"	1/4"	Yes
60"	120"	1/4"	Yes

AVAILABLE FINISHES:

AVAILABLE FOR: Steel Grey



Honed

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
60"	60"	1/4"	Yes
60"	120"	1/4"	Yes

AVAILABLE FINISHES:

AVAILABLE FOR: Concrete Grey
Concrete Silver



Honed

Height	Width	Thickness	Nominal
40"	60"	1/4"	Yes
40"	120"	1/4"	Yes
60"	60"	1/4"	Yes

AVAILABLE FOR: Satin Black
Satin White
Thassos

AVAILABLE FINISHES:



Polished



Honed

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
40"	40"	1/4"	Yes
40"	60"	1/4"	Yes
40"	120"	1/4"	Yes
60"	60"	1/4"	Yes
60"	120"	1/4"	Yes

AVAILABLE FOR: Stone Grey

AVAILABLE FINISHES:



Polished



Honed

Height	Width	Thickness	Nominal
30"	15"	1/4"	Yes
30"	30"	1/4"	Yes
30"	60"	1/4"	Yes
40"	40"	1/4"	Yes
60"	120"	1/4"	Yes

ORDER NOTE

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

All porcelain slabs can be fabricated to any size as well as mitered to create a built-up edge.

Coordinating tile is available for some Space Colors
12"x 24" - 24" x 24" - 24" x 48" - 9mm.

Contact office for Colors & Pricing if needed.

There is a \$90.00 crating fee (40 pieces per crate), for all sizes other than slabs (UNDER 500 SF). All sizes must be purchased in increments of 2.

INTERIORS	EXTERIORS	WALLS
APPLICATIONS		
FLOORS	COUNTER + VANITY TOPS	HIGH-TRAFFIC



DCOF .42 – PASS
HONED + BRUSHED FINISH

