

GRO



N A S C O

OUR GRO COLLECTION

is a concrete/cement look. It is marked by wear of its texture and movement.

It is therefore a stone that stands out for its exquisiteness and its marked Italian character.



GRO 202 Hexagon Mosaic, GRO 202 and GRO 203




GRO 203

TILES




200

12" x 24"
24" x 48"
24" x 24"
36" x 36"
48" x 48"

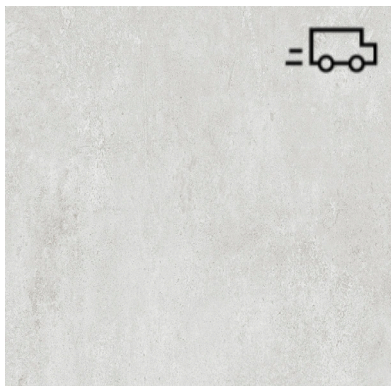


201

12" x 24"
24" x 48"
24" x 24"
36" x 36"
48" x 48"

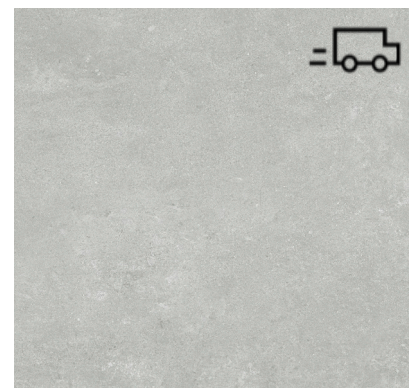


202

12" x 24"
24" x 48"
24" x 24"
36" x 36"
48" x 48"

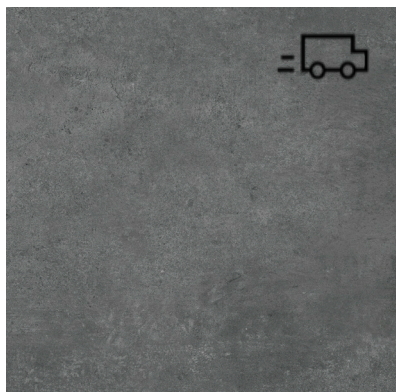


203

12" x 24"
24" x 48"
24" x 24"
36" x 36"
48" x 48"

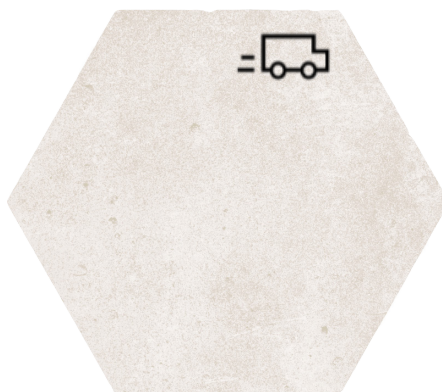


200 Hexagon

10" x 11.5"

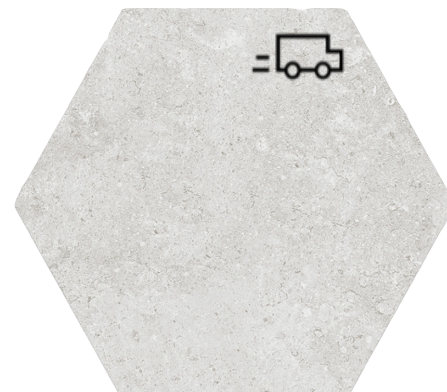


201 Hexagon

10" x 11.5"

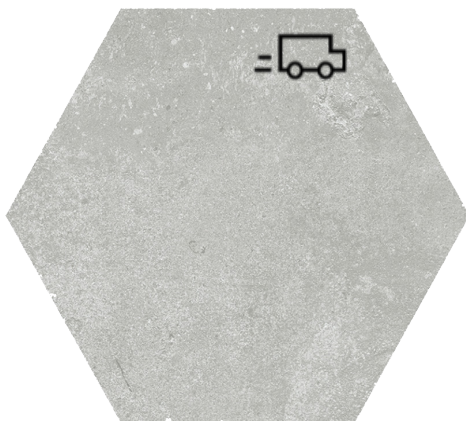

202 Hexagon

10" x 11.5"

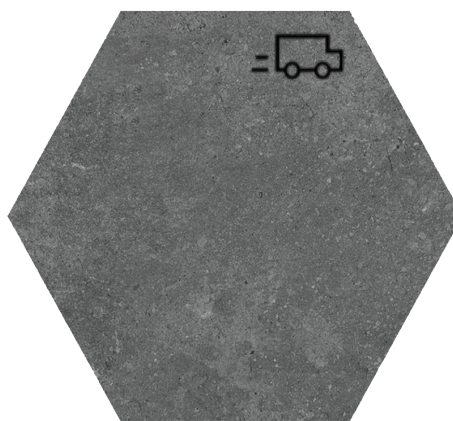

203 Hexagon

10" x 11.5"

 Quickship Available

MOSAICS




200 Hexagon Mosaic

2"x2"



200 Basketweave

2"x2"

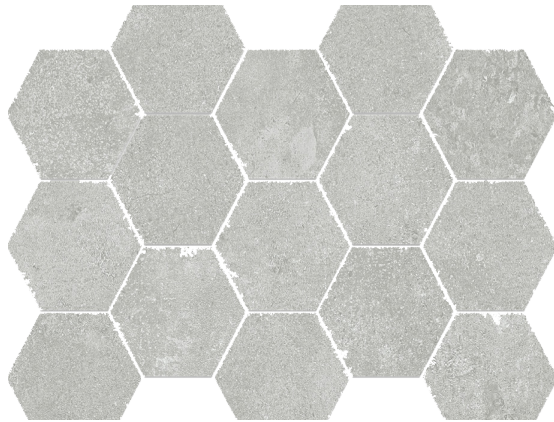


202 Hexagon Mosaic

2"x2"



201 Basketweave

2"x2"

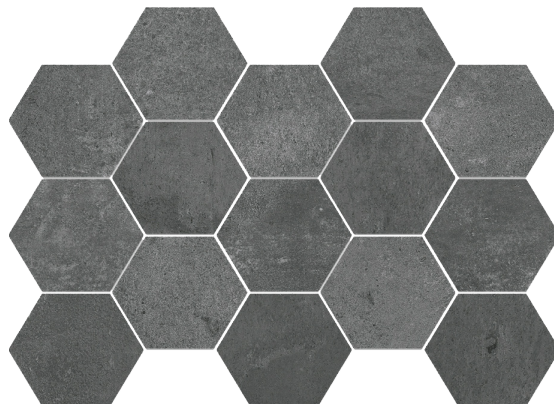

203 Hexagon Mosaic

2"x2"



202 Basketweave

2"x2"



203 Basketweave

2"x2"



200 Mosaic

2"x2"



201 Mosaic

2"x2"



202 Mosaic


2"x2"



203 Mosaic

2"x2"



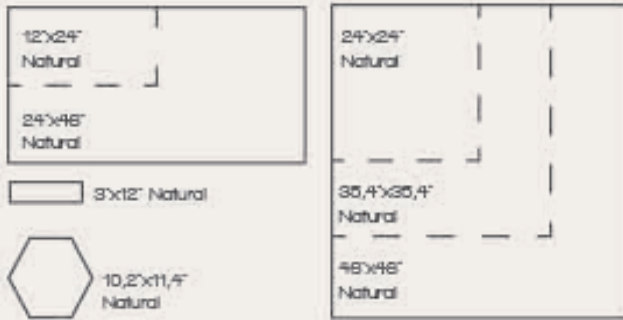

TECHNICAL FEATURES

TECHNICAL PORCELAIN

DIN 51130 DIN 51097 LINE-ENV 12633 ASTM C 1028	ISO 10545-14	ISO 10545-13	ISO 10545-12	ISO 10545-9	ISO 10545-8	ISO 10545-6	ISO 10545-4	ISO 10545-3	ISO 10545-2	STANDARD NORMES
	Minimum class 3	Test method available	Test method available	Test method available	Test method available	Máx.175 mm ³	> 35 N/mm ² > 1300 N	< 0,5%		VALUE REQUIRED BY EN 14411 STANDARD
According to models	Conforms to Standard	Conforms to Standard	Resists	Resists	< 7,0 x 10 ⁻⁴ °C ⁻¹	110-130 mm ²	35-45 N/mm ² 1800-2500 N	0,1%	Conforms to Standard	AVERAGE VALUE

GROUP E1A (a) WATER ABSORPTION <0.5% / GRUPO E1A (a) ABSORCIÓN DE AGUA <0.5%

- Slip Resistance
- Resistance to stains
- Chemical resistance
Acids and bases
Cleaning products and pool reactive agents
- Frost resistance
- Thermal shock resistance
- Linear thermal expansion
- Resistance to deep abrasion (mm³)
- Modulus of rupture
- Water absorption
- Dimensional Features

USES AND APPLICATIONS / USOS Y APLICACIONES

- Residential
- Offices
- Hotels
- Buildings
- Schools
- Hospitals
- Restaurants
- Department stores
- Sport areas
- C-Grip

SIZES


TILES

Height	Width	Thickness	Nominal
10"	11.5"	3/8"	Yes *HEXAGON*
12"	24"	3/8"	Yes
24"	24"	3/8"	Yes
36"	36"	3/8"	Yes
48"	48"	3/8"	Yes
24"	48"	3/8"	Yes

MOSAICS

Height	Width	Thickness	Nominal
2"	2"	3/8"	Yes

TRIMS



3.5"x24"
Bullnose Base

FINISHES



Matte

ORDER NOTE

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

All mosaics are available in corresponding field tiles. Mosaics are mesh-mounted.

INTERIORS	EXTERIORS	WALLS
APPLICATIONS		
FLOORS		HIGH-TRAFFIC



20% PRE-CONSUMER
RECYCLED CONTENT



DCOF .42 – PASS
HONED + BRUSHED FINISH

